

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization  
International Bureau



(43) International Publication Date  
20 December 2001 (20.12.2001)

PCT

(10) International Publication Number  
**WO 01/96324 A2**

(51) International Patent Classification<sup>7</sup>: C07D 301/00

(21) International Application Number: PCT/US01/18097

(22) International Filing Date: 5 June 2001 (05.06.2001)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:  
09/591,525 9 June 2000 (09.06.2000) US  
09/735,360 12 December 2000 (12.12.2000) US

(71) Applicant (for all designated States except US): SHELL OIL COMPANY [US/US]; One Shell Plaza, P.O. Box 2463, Houston, TX 77252-2463 (US).

(72) Inventors; and

(75) Inventors/Applicants (for US only): EVANS, Wayne, Errol [US/US]; 1019 Lively Court, Richmond, TX 77469 (US). CHIPMAN, Peter, Ingraham [US/US]; 12510 Whispering Sands Court, Houston, TX 77041 (US).

(74) Agent: STEINBERG, Beverlee; Shell Oil Company, One Shell Plaza, P.O. Box 2463, Houston, TX 77252-2463 (US).

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CR, CU, CZ, DE, DK, DM, DZ, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW.

(84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).

**Published:**

— without international search report and to be republished upon receipt of that report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: PROCESS FOR OPERATING THE EPOXIDATION OF ETHYLENE

(57) Abstract: A process for the vapor phase oxidation of ethylene to ethylene oxide, which process comprises reacting a reaction mixture comprising ethylene and oxygen in the presence of a supported highly selective silver-based catalyst by: operating at an initial operation phase wherein fresh catalyst is used, and operating at a further operation phase when a cumulative ethylene oxide production exceeds 0.01 kT ethylene oxide per m<sup>3</sup> of catalyst, wherein in said further operation phase the concentration of ethylene in the reaction mixture is increased; and a method of using ethylene oxide for making 1,2-ethanediol or a corresponding 1,2-ethanediol ether comprising converting the ethylene oxide into the 1,2-ethanediol or the 1,2-ethanediol ether wherein the ethylene oxide has been obtained by the process for the production of ethylene oxide.

WO 01/96324 A2

## PROCESS FOR OPERATING THE EPOXIDATION OF ETHYLENE

### 5 Field of the Invention

The present invention relates to a process for operating the vapor phase epoxidation of ethylene in the presence of a supported highly selective silver based catalyst.

### 10 Background of the Invention

In the catalytic epoxidation of ethylene, modern silver-based supported catalysts are highly selective towards ethylene oxide production. Under certain operation conditions their selectivity towards ethylene oxide, expressed as a percentage of the ethylene converted, can reach values above the 6/7 or 85.7 mol% limit which formerly —  
15 based on the reaction formula  $7 \text{ C}_2\text{H}_4 + 6 \text{ O}_2 \rightarrow 6 \text{ C}_2\text{H}_4\text{O} + 2 \text{ CO}_2 + 2 \text{ H}_2\text{O}$ , see Kirk-Othmer's *Encyclopedia of Chemical Technology*, 3<sup>rd</sup> ed. vol 9 (1980) p. 445 — was considered to be the theoretically maximal selectivity of this reaction. Such highly selective catalysts, which may comprise as their active components silver, rhenium, at least one further metal and optionally a rhenium co-promoter, are disclosed in EP-B-  
20 266015 and in several subsequent patent publications.

Like all catalysts, the highly selective silver based ethylene epoxidation catalysts are subject to aging-related performance decline during normal operation and they need to be exchanged periodically. The aging manifests itself by a reduction in both selectivity and activity performance of the catalyst. Selectivity and activity are the  
25 primary (although not the only) determinants of plant profitability. There exists, therefore, a considerable economic incentive for delaying the need for exchanging the catalyst by preserving these values as long as possible. Several patent publications are known which are directed at stabilizing the catalyst by introducing modifications in the catalyst composition or in the support material, but thus far the reaction conditions and, in  
30 particular, the feed composition escaped attention in this respect.

It is known, for example from EP-A-567273, that when a fresh catalyst is used, operating at a higher concentration of ethylene and/or of oxygen in the reactor feed gas can lead to both a better activity and selectivity of the ethylene epoxidation reaction.

It has now surprisingly been found that aged ethylene oxidation catalysts react  
35 differently to the composition of the reactant gas mixture than do fresh ethylene oxidation catalysts, and that in this respect also highly selective catalysts differ from traditional

5 catalysts. More specifically, when with the fresh highly selective catalysts the selectivity of the reaction towards ethylene oxide is not influenced substantially by employing a higher concentration of ethylene, with the aged highly selective catalysts the selectivity is substantially improved. Differences of activity performance under the same conditions of increased ethylene concentration between fresh and aged highly selective catalysts are in  
10 the same direction. By contrast to the highly selective catalysts, it has been found that aged and fresh traditional ethylene oxidation catalysts do not exhibit this difference in their reaction to the composition of the feed gas mixture.

#### Summary of the Invention

15 The present invention therefore provides a process for the vapor phase oxidation of ethylene to ethylene oxide, which process comprises reacting a reaction mixture comprising ethylene and oxygen in the presence of a supported highly selective silver-based catalyst by:

- operating at an initial operation phase wherein fresh catalyst is used, and
- 20 - operating at a further operation phase when a cumulative ethylene oxide production exceeds 0.01 kT ethylene oxide per m<sup>3</sup> of catalyst, wherein in said further operation phase the concentration of ethylene in the reaction mixture is increased.

In preferred embodiments, the invention provides a process for the vapor phase oxidation of ethylene to ethylene oxide in the presence of a supported highly  
25 selective silver-based catalyst, at a work rate  $w$  in the range of from 32 to 320 kg ethylene oxide produced per m<sup>3</sup> of catalyst per hour, the reaction mixture containing ethylene, oxygen, optional carbon dioxide, gas phase moderator and balance inert gases, the reaction temperature being from 180 to 325 °C, the reactor inlet pressure from 1000 to 3500 kPa and the GHSV from 1500 to 10000, the process comprising:

30 operating at an initial operation phase wherein fresh catalyst is used, the reaction gas mixture containing an ethylene concentration which represents an economically optimized balance between catalyst performance (expressed, at the given work rate  $w$ , by the selectivity  $S$  in mol% and by the operating temperature  $T$  in °C) on the one hand and ethylene vent losses on the other, and an oxygen concentration which  
35 complies with safety-related flammability restrictions; and

operating at a further operation phase when the catalyst has reached an advanced aged defined by a cumulative ethylene oxide production exceeding 0.5 kT ethylene oxide per m<sup>3</sup> of catalyst, in particular 1.5 kT ethylene oxide per m<sup>3</sup> of catalyst,

5 wherein in said further operation phase the composition of the reaction mixture is changed to contain from 1.1 to 4 times the concentration of ethylene used in the initial operation phase and the corresponding optimized and safe concentration of oxygen.

In further preferred embodiments, the invention provides a process for the vapor phase oxidation of ethylene to ethylene oxide in the presence of a supported highly selective silver-based catalyst, at a work rate  $w$  in the range of from 32 to 320 kg ethylene oxide produced per  $m^3$  of catalyst per hour, the reaction mixture containing ethylene, oxygen, optional carbon dioxide, gas phase moderator and balance inert gases, the reaction temperature being from 180 to 325 °C, the reactor inlet pressure from 1000 to 3500 kPa and the GHSV from 1500 to 10000, the process comprising:

15 operating at an initial operation phase wherein fresh catalyst is used, the reaction gas mixture containing an ethylene concentration which represents an economically optimized balance between catalyst performance (expressed, at the given work rate  $w$ , by the selectivity  $S$  in mol% and by the operating temperature  $T$  in °C) on the one hand and ethylene vent losses on the other, and an oxygen concentration which  
20 complies with safety-related flammability restrictions; and

operating at a further operation phase when the catalyst has aged sufficiently to cause the selectivity  $S$  to be reduced by at least 2.5 mol% and/or the activity parameter  $T$  to be raised by at least 15 °C, wherein the selectivity  $S$  and the activity parameter  $T$  are as defined hereinafter, and wherein in said further operation phase the composition of the  
25 reaction mixture is changed to contain from 1.1 to 4 times the concentration of ethylene used in the initial operation phase and the corresponding optimized and safe concentration of oxygen.

#### Brief Description of the Figures

30 Fig. 1 shows for a fresh high selectivity catalyst ("F S-882") and an aged high selectivity catalyst ("A S-882") the selectivity (" $S$ ") versus the ethylene concentration (" $C_2H_4$ , %") in the gas feed.

Fig. 2 shows for a fresh high selectivity catalyst ("F S-882") and an aged high selectivity catalyst ("A S-882") the activity (" $T$ ") versus the ethylene concentration  
35 (" $C_2H_4$ , %") in the gas feed.

Fig. 3 shows for a fresh conventional catalyst ("F S-860") and an aged conventional catalyst ("A S-860") the selectivity (" $S$ ") versus the ethylene concentration (" $C_2H_4$ , %") in the gas feed.

5            Fig. 4 shows for a fresh conventional catalyst ("F S-860") and an aged conventional catalyst ("A S-860") the activity ("T") versus the percent ethylene concentration (" $C_2H_4$ , %") in the gas feed.

#### Detailed Description of the Invention

10            As used herein, "aged catalyst" means a catalyst which, in the course of operation, has reached an advanced age defined by a cumulative ethylene oxide production exceeding 0.01 kT ethylene oxide per  $m^3$  of catalyst, and "fresh catalyst" means a catalyst immediately after its preparation or rejuvenation, or a catalyst which, in the course of operation, has not yet reached the advanced age as defined. Frequently, the aged catalyst  
15 has aged sufficiently to cause the selectivity S to be reduced by at least 2.5 mol% and/or the activity parameter T to be raised by at least 15 °C, wherein the selectivity S and the activity parameter T are as defined hereinafter.

          The vapor phase (direct) oxidation processes of ethylene to ethylene oxide can be air-based or oxygen-based, see Kirk-Othmer's *Encyclopedia of Chemical Technology*,  
20 3rd ed. vol 9 (1980) p. 445-447. In the air-based processes air or air enriched with oxygen is fed directly to the system while in the oxygen-based processes high-purity (>95 mol%) oxygen is employed as the source of the oxidizing agent. Presently most ethylene oxide production plants are oxygen-based and this is the preferred embodiment of the present invention.

25            Both air-based and oxygen-based processes require the venting of a purge stream in order to avoid accumulation of inert gases, though the purge stream of the air-based process is much larger because of the large amount of nitrogen which is constantly introduced. In any case, at least some ethylene is always lost with the purge stream. The amount of ethylene lost in this way depends on the purge stream (which as indicated above  
30 is smaller in oxygen-based plants) but also on the concentration of ethylene in the reaction gas mixture. The technical and economical conditions (including the price of ethylene) determine for every individual plant an optimized balance between best catalyst performance and least ethylene vent losses.

          Further, in order to remain outside the flammability limit of the gas mixture,  
35 the concentration of oxygen may be lowered as the concentration of ethylene is increased. The actual safe operating ranges depend, along with the gas composition (reactants and balance gases), also on individual plant conditions such as temperature and pressure. More particularly, the maximum oxygen concentration which may be used, i.e. the oxygen

5 flammability limit, is reduced by the gas containing higher concentrations of ethylene and/or ethylene oxide, by a higher temperature and/or by a higher pressure employed, and it is increased by the gas containing higher concentrations of paraffins such as methane and/or ethane. In each individual plant a so-called flammability equation is used to determine the concentration of oxygen which may be used with any given concentration of  
10 e.g. ethylene. This flammability equation can be expressed graphically in a so-called flammability curve.

"GHSV" or Gas Hourly Space Velocity, is the unit volume of gas at standard temperature and pressure (0 °C, 1 atm, i.e. 101.3 kPa) passing over one unit volume of packed catalyst per hour. Preferably, the process is carried out at a GHSV in the range of  
15 from 1500 to 10000. The reaction temperature is preferably in the range of from 180 to 325 °C, and the reactor inlet pressure is preferably in the range of from 1000 to 3500 kPa.

The work rate  $w$ , which is the amount of ethylene oxide produced per unit volume of catalyst (kg per m<sup>3</sup>, or gram per liter, etc.) per hour, is influenced by the temperature, the pressure and the gas velocity used. Preferably, the process of this  
20 invention is carried out at a work rate  $w$  in the range of from 25 to 400 kg ethylene oxide produced per m<sup>3</sup> of catalyst per hour, in particular 32 to 320 kg ethylene oxide produced per m<sup>3</sup> of catalyst per hour, for example 200 kg ethylene oxide produced per m<sup>3</sup> of catalyst per hour.

The value of the selectivity parameter  $S$ , expressed in mol% of the desired  
25 ethylene oxide formed relative to the total of ethylene converted at a given work rate  $w$ , will vary with the value of the actual work rate  $w$ .

The value of the activity parameter  $T$ , which is the operating temperature, expressed in °C, needed to reach a given work rate  $w$ , will also vary with the value of  $w$ .

In a preferred embodiment of this invention, the reaction gas mixture contains  
30 ethylene at a concentration which represents an economically optimized balance between catalyst performance (expressed, at the given work rate  $w$ , by the selectivity  $S$  and by the activity parameter  $T$ ) on the one hand and ethylene vent losses on the other, and oxygen at a concentration which complies with the safety-related flammability restrictions.

The optimal ethylene concentration, calculated on the total of the reaction  
35 mixture, which is used in the initial operation phase, depends on the plant, the catalyst, the reaction conditions and the work rate  $w$  chosen. Preferably, the ethylene concentration, calculated on the total of the reaction mixture, will be at most 50 mol%. More preferably, it will be in the range of from 2 to 45 mol%, in particular from 2 to 40 mol% of ethylene,

5 the concentration usually used with air operated plants ranging from 2 to 15 mol% and the concentration usually used in oxygen operated plants ranging from 15 to 45 mol%, in particular 15 to 40 mol% of ethylene.

As used herein, the composition of the reaction mixture means is deemed to be the composition of the gas feed to the reactor, expressed as a fraction, e.g. in mol% or ppm  
10 by volume (ppmv), relative to the total gas feed.

In the further operation phase according to the present invention, the concentration of ethylene is increased preferably to a level of from 1.1 to 4 times the concentration of ethylene used in the initial operation phase. More particularly it will be raised by from 5 to 30 mol% of ethylene, preferably by from 10 to 20 mol%. Preferably,  
15 the concentration of ethylene is increased to at least 30 mol%, more preferably to at least 40 mol%, in particular to at least 50 mol%. Preferably, the concentration of ethylene is increased to at most 90 mol%, more preferably to at most 80 mol%, in particular to at most 70 mol%.

In the further operation phase the concentration of ethylene is raised when the  
20 cumulative ethylene oxide production exceeds 0.01 kT ethylene oxide per m<sup>3</sup> of catalyst, wherein "kT" means 10<sup>6</sup> kg. Typically the concentration of ethylene is raised when the cumulative ethylene oxide production exceeds 0.1 kT ethylene oxide per m<sup>3</sup> of catalyst, more typically 0.3 kT ethylene oxide per m<sup>3</sup> of catalyst, preferably 0.5 kT ethylene oxide per m<sup>3</sup> of catalyst, more preferably 1 kT ethylene oxide per m<sup>3</sup> of catalyst, in particular  
25 1.5 kT ethylene oxide per m<sup>3</sup> of catalyst. Frequently, the concentration of ethylene will be raised before the cumulative ethylene oxide production exceeds 50 kT ethylene oxide per m<sup>3</sup> of catalyst, more frequently before the cumulative ethylene oxide production exceeds 10 kT ethylene oxide per m<sup>3</sup> of catalyst.

The increase in the ethylene concentration may be one or more stepwise  
30 increases, it may also involve one or more gradual increases over a period of time, or a combination of stepwise and gradual increases.

In the process oxygen is preferably applied at "the corresponding optimal concentration of oxygen", by which is meant the concentration of oxygen which, under the temperature and pressure conditions employed and combined with the chosen  
35 concentration of ethylene, secures optimal performance while avoiding the flammability limit.

Generally, the concentration of oxygen applied in the initial operation phase will be within the broad range of from 6 to 12 mol% of the total gas feed.

5            Preferably, in the further operation phase according to the present invention, the concentration of oxygen used will be lowered to a level of 0.98 to 0.3 times the concentration of oxygen used in the initial operation phase, and more particularly it will be lowered by from 0.4 to 3.5 mol%, typically depending on the level by which the ethylene concentration is raised. Typically for any mol% absolute increase in ethylene  
10 concentration, the oxygen concentration may be decreased by from 0.02 to 0.15 mol% absolute, more typically from 0.05 to 0.1 mol% absolute, for example 0.08 mol% absolute. Typically for any % relative increase in the ethylene concentration, the relative decrease in the oxygen concentration may be from 0.05 to 0.8 %, more typically from 0.15 to 0.5 %, for example 0.22 %. Preferably, the concentration of oxygen is decreased to at most  
15 10 mol%, more preferably to at most 8 mol%. Preferably, the concentration of oxygen is decreased to at least 3 mol%, more preferably to at least 4 mol%.  
Generally, the change in the oxygen concentration, if any, may be co-current with the change in the ethylene concentration.

            In addition to ethylene and oxygen, the reaction mixture of the process of this  
20 invention may contain one or more optional components, such as carbon dioxide, a gas phase moderator and balance inert gases.

            Carbon dioxide is a by-product of the ethylene oxidation process. Since frequently unconverted ethylene is continuously recycled, and since concentrations of carbon dioxide in the reactor feed which are much in excess of 15 mol% will have an  
25 adverse effect on catalyst activity, accumulation of carbon dioxide will be avoided by and continuously removing carbon dioxide from the recycle gas. This may be done by venting and by continuous absorption of the formed carbon dioxide. Currently concentrations of carbon dioxide as low as 1 mol% are practical, and in future even lower concentrations may be reached. The process of the present invention is independent of the presence or  
30 absence of carbon dioxide in the reaction mixture.

            A gas phase catalyst moderator may be added to the feed for increasing the selectively, suppressing the undesirable oxidation of ethylene and of ethylene oxide to carbon dioxide and water. Many organic compounds, especially organic halides but also amines, organometallic compounds and aromatic hydrocarbons are known to be effective  
35 in this respect. Organic halides are the preferred gas phase catalyst moderators and they are effective without suppressing the desired reaction when used in concentrations ranging from 0.1 to 25 ppmv, in particular from 0.3 to 20 ppmv of the total volume of the feed gas.



5           The optimal concentration of gas phase catalyst moderator may depend on  
plant conditions and on the type of catalyst used. Conventional catalysts have relatively  
flat selectivity curves for the moderator (i.e. their selectivity is almost invariant over a  
wide range of moderator concentrations), and this property does not change during  
prolonged operation of the catalyst. Therefore the concentration of the moderator can be  
10 more freely chosen and it can remain the same during the entire lifespan of the catalyst.  
By contrast the highly selective catalysts tend to exhibit relatively steep moderator  
selectivity curves (i.e. selectivity varies considerably with relatively small changes in  
moderator concentration, and exhibits a pronounced maximum at the most advantageous  
or optimum level of moderator). This moderator optimum, moreover, does tend to change  
15 during prolonged operation. Consequently, the moderator concentration may be optimized  
repeatedly during operation if the maximum achievable selectivity is to be maintained. In  
the initial operation phase the concentration of the organic halides is typically in the range  
of from 0.5 to 10 ppmv, preferably from 2 to 8 ppmv of the total volume of the feed gas.  
In the further operation phase the concentration of the organic halides is typically in the  
20 range of from 2 to 25 ppmv, preferably from 3 to 16 ppmv of the total volume of the feed  
gas:

Preferred organic halides are  $C_1$  to  $C_8$  chlorohydrocarbons or  
bromohydrocarbons. More preferably they are selected from the group of methyl chloride,  
ethyl chloride, ethylene dichloride, ethylene dibromide, vinyl chloride or a mixture  
25 thereof. Most preferred gas phase catalyst moderator are ethyl chloride and ethylene  
dichloride.

The balance inert gases usually present in the reaction feed comprise varying  
concentrations of nitrogen, argon, and added saturated hydrocarbon such as methane or  
ethane. Since unconverted ethylene is continuously recycled, and oxygen added, the  
30 accumulation of balance gases has to be avoided. The process of the present invention is  
independent of the amount of balance inert gases in the reaction mixture.

The efficiency of the ethylene oxidation reaction and catalyst is defined by  
selectivity S and activity T.

In both the initial operating phase and the further operation phase, the optimal  
35 ethylene concentration may be determined by successively measuring, at a fixed value of  
w, the performance in terms of S and T of progressively raised concentrations of ethylene,  
coupled with the corresponding safe concentrations of oxygen, until no further  
improvement can be reached.

5           The material of the support of the supported silver based catalysts can be selected from a wide range of conventional materials which are considered to be inert in the presence of the ethylene oxidation feeds, products and reaction conditions. Such conventional materials can be natural or artificial and they include the aluminum oxides, magnesia, zirconia, silica, silicon carbide, clays, pumice, zeolites and charcoal. Alpha  
10 alumina is the most preferred material to be used as the main ingredient of the porous support.

          The support is porous and preferably has a surface area, as measured by the B.E.T. method, of less than 20 m<sup>2</sup>/g and more in particular from 0.05 to 20 m<sup>2</sup>/g. Preferably the B.E.T. surface area of the support is in the range of 0.1 to 10, more  
15 preferably from 0.1 to 3.0 m<sup>2</sup>/g. The B.E.T. method of measuring the surface area has been described in detail by Brunauer, Emmet and Teller in *J. Am. Chem. Soc.* 60 (1938) 309-316.

          A highly selective supported silver-based catalyst according to the present invention is one which, when operated fresh, exhibits at 260 °C a theoretical selectivity at  
20 zero work rate,  $S_0$ , of at least 6/7 or 85.7%. The value of  $S_0$  for a given catalyst is found by operating the catalyst at 260 °C in a range of work rates  $w$ , resulting in a range of selectivity values  $S$  corresponding to the range of work rates  $w$ . These values  $S$  are then  
extrapolated back to the theoretical value of  $S$  at zero work rate, by the use of conventional curve-fitting algorithms, such as those provided with the MICROSOFT® Excel program.

25           Preferred supported highly selective silver-based catalysts to be used in the present invention are rhenium containing catalysts. Such catalysts are known from EP-B-266015. Broadly, they contain a catalytically effective amount of silver, a promoting amount of rhenium or compound thereof, a promoting amount of at least one further metal or compound thereof and optionally a co-promoting amount of a rhenium co-promoter  
30 which can be selected from one or more of sulfur, phosphorus, boron, and compounds thereof, on a refractory support. More specifically the at least one further metal of these rhenium containing catalysts is/are selected from the group of alkali metals, alkaline earth metals, molybdenum, tungsten, chromium, titanium, hafnium, zirconium, vanadium, thallium, thorium, tantalum, niobium, gallium and germanium and mixtures thereof.  
35 Preferably the at least one further metal is/are selected from the alkali metals such as lithium, potassium, rubidium and cesium and/or from the alkaline earth metals such as calcium and barium. Most preferably it is lithium, potassium and/or cesium.

5 Preferred amounts of the components of these catalysts are, when calculated as the element on the total catalyst:

- silver from 10 to 300 g/kg,
- rhenium from 0.01 to 15 mmol/kg,
- further metal or metals from 10 to 3000 mg/kg, and
- 10 - optional rhenium co-promoter from 0.1 to 10 mmol/kg.

The ethylene oxide produced may be recovered from the reaction mixture by using methods known in the art, for example by absorbing the ethylene oxide from a reactor outlet stream in water and optionally recovering the ethylene oxide from the aqueous solution by distillation. At least a portion of the aqueous solution containing the  
15 ethylene oxide may be applied in a subsequent process for converting the ethylene oxide into a 1,2-diol or a 1,2-diol ether.

The ethylene oxide produced in the present process, i.e. ethylene oxide, may be converted into 1,2-ethanediol or into a 1,2-ethanediol ether. The improved catalyst performance achieved by this invention leads to a more attractive process for the  
20 production of ethylene oxide and concurrently to a more attractive process which comprises producing ethylene oxide and the subsequent use of the obtained ethylene oxide in the manufacture of 1,2-ethanediol and/or a 1,2-ethanediol ether.

The conversion into 1,2-ethanediol or a 1,2-ethanediol ether may comprise, for example, reacting the ethylene oxide with water, suitably using an acidic or a basic  
25 catalyst. For example, for making predominantly 1,2-ethanediol and less 1,2-ethanediol ethers, the ethylene oxide may be reacted with a ten fold molar excess of water, in a liquid phase reaction in presence of an acid catalyst, e.g. 0.5-1.0 %w sulfuric acid, based on the total reaction mixture, at 50-70 °C at 1 bar absolute, or in a gas phase reaction at 130-240 °C and 20-40 bar absolute, preferably in the absence of a catalyst. If the proportion of  
30 water is lowered the proportion of 1,2-ethanediol ethers in the reaction mixture is increased. The 1,2-ethanediol ethers thus produced may be the di-ether, tri-ether, tetra-ether and subsequent ethers. Alternative 1,2-ethanediol ethers may be prepared by converting the ethylene oxide with an alcohol, in particular a primary alcohol, such as methanol or ethanol, by replacing at least a portion of the water by the alcohol.

35 The 1,2-ethanediol and the 1,2-ethanediol ethers may be used in a large variety of industrial applications, for example in the fields of food, beverages, tobacco, cosmetics, thermoplastic polymers, curable resin systems, detergents, heat transfer systems, etc.

5                   The following examples will illustrate the invention.

Part I: The Catalysts

          Catalyst A was S-882, a commercial Shell catalyst of the High Selectivity type as defined in EP-B-266015, containing rhenium promoter and rhenium co-promoter  
10       and having a theoretical selectivity  $S_0$  of 93% in the fresh state.

          Comparative Catalyst B was S-860, a commercial Shell catalyst of the conventional type as defined in US-A-5380697, not containing rhenium and rhenium co-promoter and having a theoretical selectivity  $S_0$  of 85% in the fresh state.

          The above values of  $S_0$  were determined by collecting a range of selectivities  
15       S at multiple space velocities, each time at 30% ethylene, 8% oxygen, 5% carbon dioxide and 14 bar for both catalysts, the reaction temperature being 260 °C for Catalyst A and 235 °C for Catalyst B - and extrapolating back to infinite space velocity (i.e. zero work rate).

          Fresh and aged Catalyst A and Comparative Catalyst B were tested. The aged catalyst A was taken from a commercial plant where it had been used for 21 months, having produced a total of 2400 Kg of ethylene oxide per liter of catalyst. The aged  
20       Comparative Catalyst B was taken from a commercial plant where it had been used for 34 months, having produced a total of 4500 Kg of ethylene oxide per liter of catalyst. Both aged catalysts were taken from the heart of the respective reactor tubes. They were analyzed and found to be free of contaminants.

25

Part II: The Catalyst Test Procedure

          In each experiment, 1 to 5 grams of crushed catalyst (0.8-1.4 mm) were loaded into a micro-reactor consisting of a 3 mm internal diameter stainless steel U-shaped tube. The U-shaped tube was immersed in a molten metal tin/bismuth bath (heat medium) and  
30       the ends were connected to a gas flow system. The weight of the catalyst and the inlet gas flow rate were adjusted to achieve a gas hourly space velocity of 3300 ml of gas per ml of catalyst per hour. The inlet gas pressure was 1600 kPa.

          In each experiment, the effect on one fresh or aged catalyst of one of seven equally spaced concentrations of ethylene in the feed, ranging from 25 to 55 mol%, was  
35       tested under optimized further feed and temperature conditions. In the feed, the concentration of oxygen used in each experiment was the maximum allowed within the flammability limit and ranged from 9 to 6.5 mol%. The concentration of carbon dioxide

- 5 was set to a typical level for each type of catalyst, i.e., 3.5% for the fresh highly selective catalyst, and 5.0% for the aged highly selective catalyst and for the conventional catalysts. The concentration of ethyl chloride was optimized over the range of 2.0 – 4.0 ppmv for the fresh highly selective catalyst, optimized over the range of 3.0 – 7.0 ppmv for the aged highly selective catalyst, and set at 2.5 ppmv for the fresh and aged conventional catalysts.
- 10 Nitrogen ballast comprised the remainder of the bulk feed mixture. The temperature in each experiment was adjusted, by raising it gradually, to achieve a constant work rate  $w$  (mg of ethylene oxide produced per ml of catalyst per hour). In accordance with typical commercial practice, the constant work rate  $w$  was 200 kg/m<sup>3</sup>/hr for the fresh and aged S-882 catalyst and for the fresh S-860 catalyst, and 160 kg/m<sup>3</sup>/hr for the aged S-860 catalyst.

15

### Part III: The Results

The results are given in the following Table I (EO denotes ethylene oxide) and in Figures 1 to 4. In all the Figures, the percentage of oxygen was adjusted to conform with flammability.

5

Table I

Example	Catalyst	O <sub>2</sub> , mol% in feed	C <sub>2</sub> H <sub>4</sub> , mol% in feed	S (% EO)	T (°C)
Comp. 1	S-882, FRESH	9.1	25	87.5	254
Comp. 2	S-882, FRESH	8.2	35	87.6	255
Comp. 3	S-882, FRESH	7.4	45	87.1	254
Comp. 4	S-882, FRESH	6.6	55	87.2	254
5	S-882, AGED	9.0	25	80.7	281
6	S-882, AGED	8.6	30	81.4	281
7	S-882, AGED	8.2	35	82.8	280
8	S-882, AGED	7.8	40	82.9	279
9	S-882, AGED	7.4	45	83.2	279
10	S-882, AGED	7.0	50	83.2	275
11	S-882, AGED	6.6	55	83.7	274
Comp. 12	S-860, FRESH	9.1	25	80.2	236
Comp. 13	S-860, FRESH	8.7	30	80.1	235
Comp. 14	S-860, FRESH	8.2	35	80.3	233
Comp. 15	S-860, FRESH	7.8	40	80.1	230
Comp. 16	S-860, FRESH	7.4	45	80.6	232
Comp. 17	S-860, FRESH	7.0	50	80.9	229
Comp. 18	S-860, FRESH	6.6	55	80.8	229
Comp. 19	S-860, AGED	9.1	25	77.4	240
Comp. 20	S-860, AGED	8.7	30	76.9	240
Comp. 21	S-860, AGED	8.2	35	76.2	241
Comp. 22	S-860, AGED	7.8	40	76.0	240
Comp. 23	S-860, AGED	7.4	45	76.3	238
Comp. 24	S-860, AGED	7.0	50	76.2	240
Comp. 25	S-869, AGED	6.6	55	75.9	239

From these results it emerges that in particular the aged S-882 catalyst is distinguished over the fresh S-882 and S-860 and the aged S-860 in that its performance (selectivity as well as activity) is clearly improved when the concentration of ethylene in the feed is raised from 25 to 55 mol%. With the fresh highly selective catalysts the selectivity of the reaction towards ethylene oxide is not influenced substantially when a higher concentration of ethylene is combined with a lower (i.e. safe) concentration of oxygen, while with the aged highly selective catalysts the selectivity under these conditions is substantially improved. Differences of activity performance under conditions of raised ethylene concentration and lowered oxygen concentration between fresh and aged highly selective catalysts are in the same direction but less pronounced. By contrast to the highly selective catalysts it has been found that aged and fresh traditional ethylene oxidation catalysts do not exhibit this clear difference in their reaction to the

- 5 composition of the feed gas mixture. Thus, by raising the ethylene content of the reaction gas mixture, yet simultaneously reducing the oxygen content to remain below the flammability limit, both selectivity and activity of the aged high selectivity catalyst are improved significantly.

10

5

## CLAIMS

1. A process for the vapor phase oxidation of ethylene to ethylene oxide, which process comprises reacting a reaction mixture comprising ethylene and oxygen in the presence of a supported highly selective silver-based catalyst by:

- operating at an initial operation phase wherein fresh catalyst is used, and
- operating at a further operation phase when a cumulative ethylene oxide production exceeds 0.01 kT ethylene oxide per m<sup>3</sup> of catalyst, wherein in said further operation phase the concentration of ethylene in the reaction mixture is increased.

2. A process as claimed in claim 1, wherein in the further operation phase the concentration of ethylene is raised when the cumulative ethylene oxide production exceeds 0.3 kT ethylene oxide per m<sup>3</sup> of catalyst.

20

3. A process as claimed in claim 2, wherein in the further operation phase the concentration of ethylene is raised when the cumulative ethylene oxide production exceeds 0.5 kT ethylene oxide per m<sup>3</sup> of catalyst.

4. A process as claimed in claim 3, wherein in the further operation phase the concentration of ethylene is raised when the cumulative ethylene oxide production exceeds 1 kT ethylene oxide per m<sup>3</sup> of catalyst.

25

5. A process as claimed in claim 1, wherein the concentration of ethylene is increased to from 1.1 to 4 times the concentration of ethylene used in the initial operation phase.

30

6. A process as claimed in claim 5, wherein the concentration of oxygen used is lowered to from 0.98 to 0.3 times the concentration of oxygen used in the initial operation phase.

35



5

7. A process according to claim 1, wherein the supported highly selective silver based catalyst comprises a catalytically effective amount of silver, a promoting amount of rhenium or compound thereof, a promoting amount of at least one further metal or compound thereof, and optionally a co-promoting amount of a rhenium co-promoter selected from one or more of sulfur, phosphorus, boron, and compounds thereof.

8. A process according to claim 7, wherein the at least one further metal is selected from alkali metals, alkaline earth metals, molybdenum, tungsten, chromium, titanium, hafnium, zirconium, vanadium, thallium, thorium, tantalum, niobium, gallium, germanium and mixtures thereof.

9. A process according to claim 8, wherein the at least one further metal comprises lithium, potassium and/or cesium.

10. A process according to claim 8, wherein, calculated as the element on the total catalyst,

- the amount of silver is in the range of from 10 to 300 g/kg,
- the amount of rhenium is in the range of from 0.01 to 15 mmol/kg,
- the amount of further metal or metals is in the range of from 10 to 3000 mg/kg, and
- the amount of optional rhenium co-promoter is in the range of from 0.1 to 10 mmol/kg.

11. A process according to claim 1, wherein the support is porous and its surface area is in the range of from 0.05 to 20 m<sup>2</sup>/g.

12. A process according to claim 11, wherein the material of the support is mainly alpha alumina.

13. A process according to claim 1, wherein the gas phase moderator is 0.3-25 ppmv of an organic halide.

5



14. A process according to claim 13, wherein the organic halide is a C<sub>1</sub> to C<sub>8</sub> chlorohydrocarbon or bromohydrocarbon.

15. A process according to claim 14, wherein the organic halide is selected  
10 from methyl chloride, ethyl chloride, ethylene dichloride, ethylene  
dibromide, vinyl chloride and mixtures thereof.



16. A process according to claim 1, wherein in the further operation phase the  
composition of the reaction mixture is changed to contain from 5 to 30 mol% more of  
15 ethylene than the concentration of ethylene used in the initial operation phase.

17. A method of using ethylene oxide for making 1,2-ethanediol or a  
corresponding 1,2-ethanediol ether comprising converting the ethylene oxide into the 1,2-  
ethanediol or the 1,2-ethanediol ether wherein the ethylene oxide has been obtained by a  
20 process for the production of ethylene oxide according to claim 1.

1/2

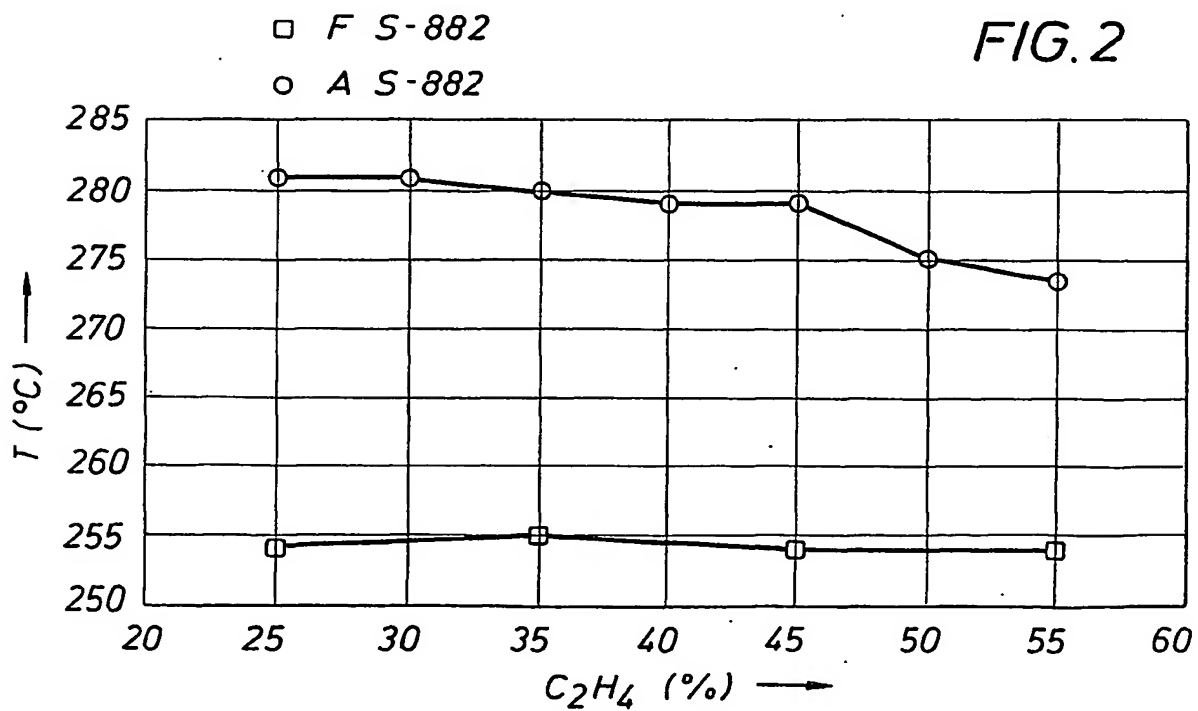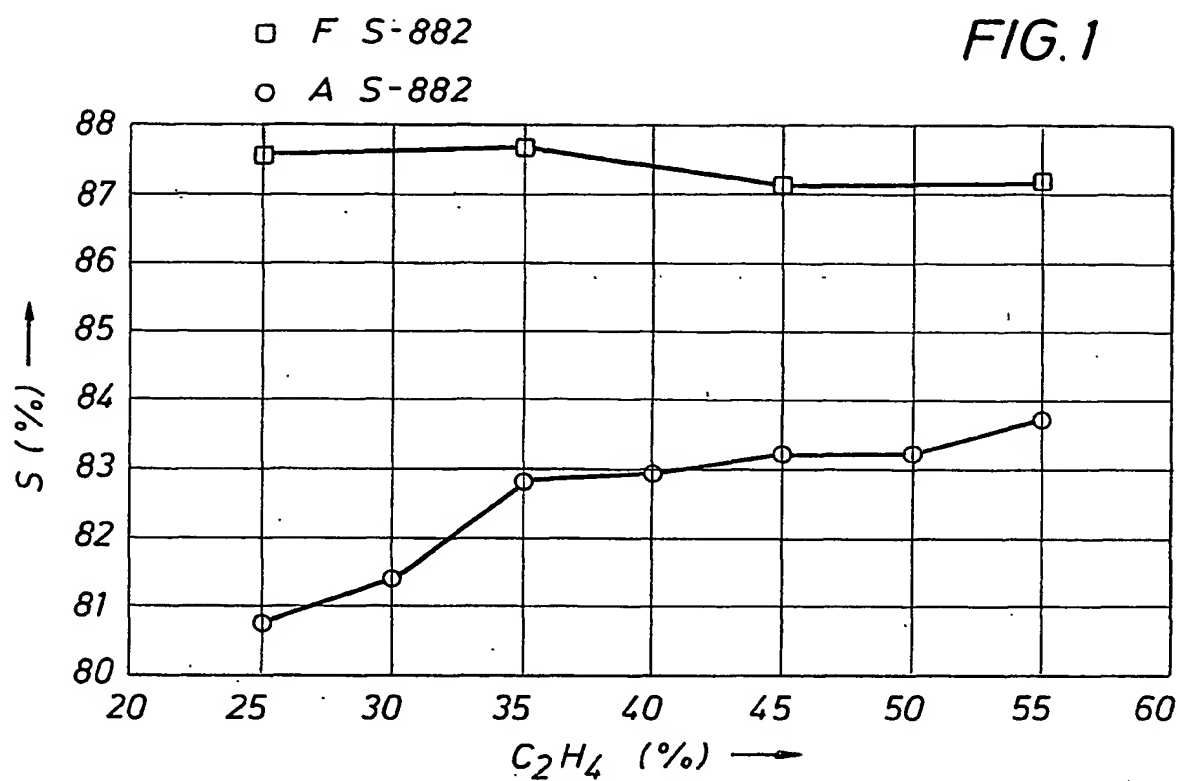

2/2

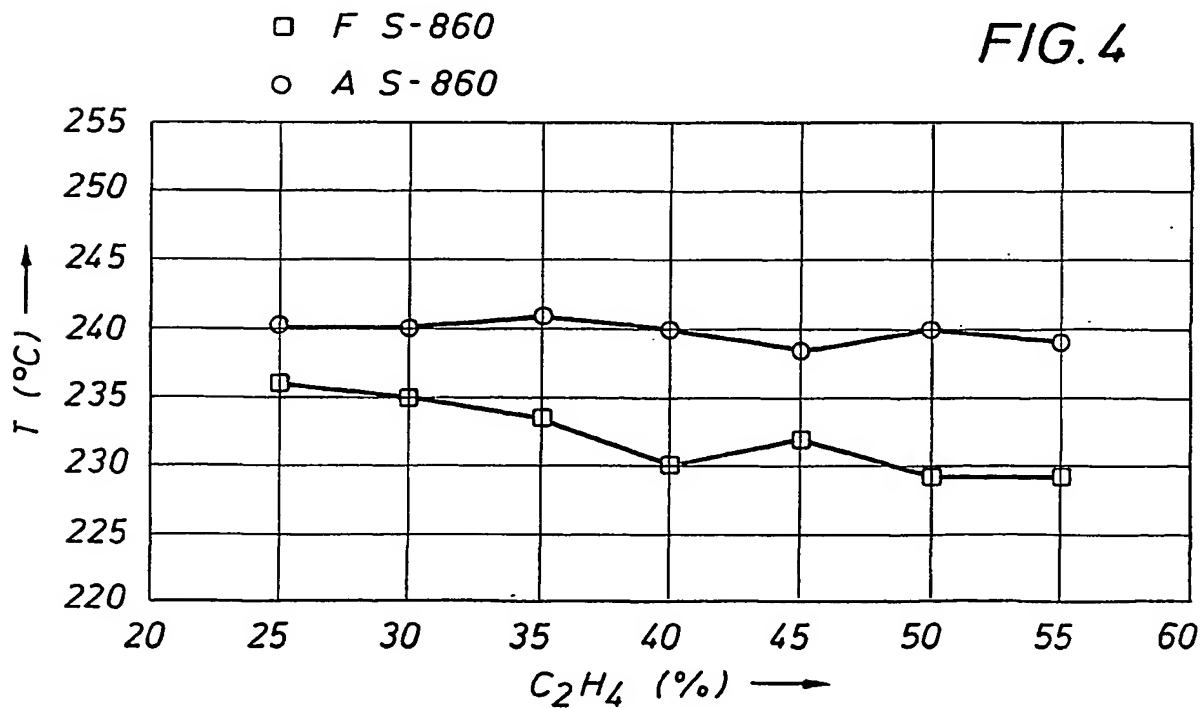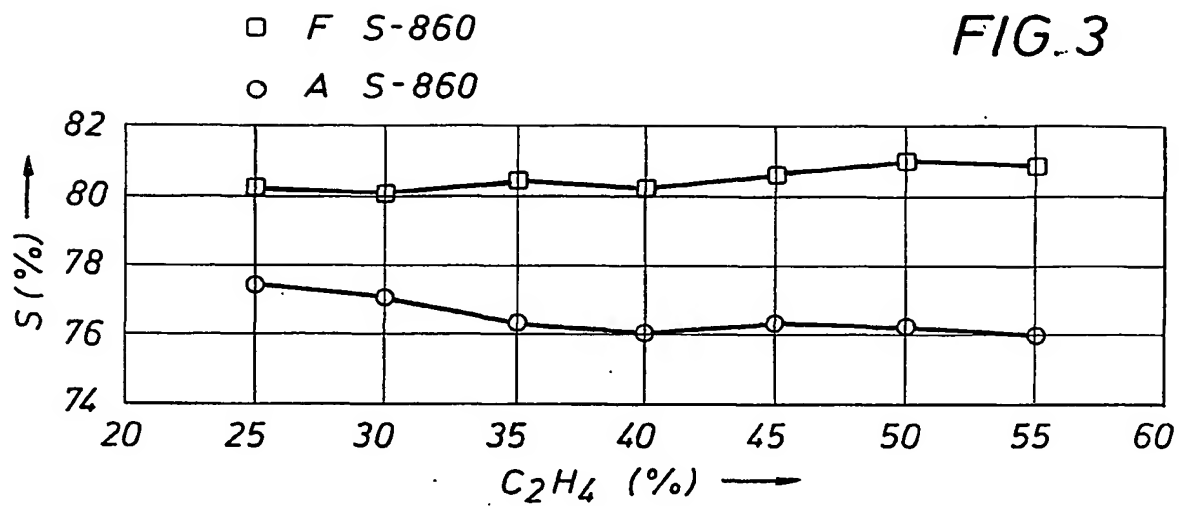

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization  
International Bureau



(43) International Publication Date  
20 December 2001 (20.12.2001)

PCT

(10) International Publication Number  
**WO 01/96324 A3**

(51) International Patent Classification<sup>7</sup>: C07D 301/10,  
B01J 23/68, C07C 29/10

(21) International Application Number: PCT/US01/18097

(22) International Filing Date: 5 June 2001 (05.06.2001)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:  
09/591,525 9 June 2000 (09.06.2000) US  
09/735,360 12 December 2000 (12.12.2000) US

(71) Applicant (*for all designated States except US*): SHELL  
OIL COMPANY [US/US]; One Shell Plaza, P.O. Box  
2463, Houston, TX 77252-2463 (US).

(72) Inventors; and

(75) Inventors/Applicants (*for US only*): EVANS, Wayne,  
Errol [US/US]; 1019 Lively Court, Richmond, TX 77469  
(US). CHIPMAN, Peter, Ingraham [US/US]; 12510  
Whispering Sands Court, Houston, TX 77041 (US).

(74) Agent: STEINBERG, Beverlee; Shell Oil Company,  
One Shell Plaza, P.O. Box 2463, Houston, TX 77252-2463  
(US).

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU,  
AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CR, CU, CZ,  
DE, DK, DM, DZ, EE, ES, FI, GB, GD, GE, GH, GM, HR,  
HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR,  
LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ,  
NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM,  
TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW.

(84) Designated States (*regional*): ARIPO patent (GH, GM,  
KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian  
patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European  
patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE,  
IT, LU, MC, NL, PT, SE, TR), OAPI patent (BF, BJ, CF,  
CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).

**Published:**

— with international search report

(88) Date of publication of the international search report:  
28 March 2002

*For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*

(54) Title: PROCESS FOR OPERATING THE EPOXIDATION OF ETHYLENE

(57) Abstract: A process for the vapor phase oxidation of ethylene to ethylene oxide, which process comprises reacting a reaction mixture comprising ethylene and oxygen in the presence of a supported highly selective silver-based catalyst by: operating at an initial operation phase wherein fresh catalyst is used, and operating at a further operation phase when a cumulative ethylene oxide production exceeds 0.01 kT ethylene oxide per m<sup>3</sup> of catalyst, wherein in said further operation phase the concentration of ethylene in the reaction mixture is increased; and a method of using ethylene oxide for making 1,2-ethanediol or a corresponding 1,2-ethanediol ether comprising converting the ethylene oxide into the 1,2-ethanediol or the 1,2-ethanediol ether wherein the ethylene oxide has been obtained by the process for the production of ethylene oxide.

WO 01/96324 A3

## INTERNATIONAL SEARCH REPORT

International Application No

PCT/US 01/18097

## A. CLASSIFICATION OF SUBJECT MATTER

IPC 7 C07D301/10 B01J23/68 C07C29/10

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 C07D B01J C07C

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, CHEM ABS Data, WPI Data

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	EP 0 266 015 A (SHELL INT RESEARCH) 4 May 1988 (1988-05-04) cited in the application claim 1; examples 7,8 ---	1
A	GB 1 319 004 A (NIPPON CATALYTIC CHEM IND) 31 May 1973 (1973-05-31) page 2, line 34 - line 50 examples ---	1
A	EP 0 625 370 A (SHELL INT RESEARCH) 23 November 1994 (1994-11-23) claim 1; table III ---	1
A	US 5 545 603 A (KEMP RICHARD A) 13 August 1996 (1996-08-13) claim 1; table III ---	1
	-/--	



Further documents are listed in the continuation of box C.



Patent family members are listed in annex.

## \* Special categories of cited documents:

- \*A\* document defining the general state of the art which is not considered to be of particular relevance
- \*E\* earlier document but published on or after the international filing date
- \*L\* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- \*O\* document referring to an oral disclosure, use, exhibition or other means
- \*P\* document published prior to the international filing date but later than the priority date claimed

\*T\* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

\*X\* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

\*Y\* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

\*G\* document member of the same patent family

Date of the actual completion of the international search

7 December 2001

Date of mailing of the international search report

14/12/2001

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel. (+31-70) 340-2040. Tx. 31 651 epo nl.  
Fax: (+31-70) 340-3016

Authorized officer

Hass, C

## INTERNATIONAL SEARCH REPORT

International Application No

PCI/US 01/18097

## C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	EP 0 567 273 A (TEXACO CHEMICAL) 27 October 1993 (1993-10-27) cited in the application claim 1; example 1; tables I-III ---	1
A	US 5 380 697 A (MATUSZ MAREK ET AL) 10 January 1995 (1995-01-10) cited in the application ---	
A	EP 0 557 833 A (BASF AG) 1 September 1993 (1993-09-01) claims 1,2,4; tables II,III ---	1
X	US 4 400 559 A (BHISE VIJAY S) 23 August 1983 (1983-08-23) abstract; claim 1 ---	17
X	DE 198 43 697 A (BASF AG) 30 March 2000 (2000-03-30) claim 1 ---	17
X	US 3 935 279 A (COCUZZA GIOACCHINO ET AL) 27 January 1976 (1976-01-27) claim 1 -----	17

# INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/US 01/18097

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
EP 0266015	A	04-05-1988	US 4766105 A	23-08-1988
			US 4761394 A	02-08-1988
			AT 69977 T	15-12-1991
			AU 592478 B2	11-01-1990
			AU 8053987 A	05-05-1988
			BG 60854 B1	31-05-1996
			BR 8705810 A	31-05-1988
			CA 1304346 A1	30-06-1992
			CN 87107194 A , B	27-07-1988
			CS 8806977 A2	12-09-1990
			CS 8707729 A2	13-06-1990
			DE 3774999 D1	16-01-1992
			DK 560087 A	01-05-1988
			EG 18719 A	30-12-1993
			EP 0266015 A1	04-05-1988
			ES 2028860 T3	16-07-1992
			FI 874786 A , B,	01-05-1988
			GR 3003662 T3	16-03-1993
			HU 47046 A2	30-01-1989
			IE 60557 B	27-07-1994
			IL 84232 A	21-06-1992
			IN 169589 A1	16-11-1991
			JP 2619660 B2	11-06-1997
			JP 63126552 A	30-05-1988
			KR 9611047 B1	16-08-1996
			MX 170627 B	31-08-1993
			NO 874528 A , B,	02-05-1988
			NZ 222342 A	27-09-1989
			PH 25304 A	30-04-1991
			PT 86038 A , B	01-11-1987
			RO 100109 A2	02-12-1991
			SG 126392 G	19-02-1993
			SU 1831369 A3	30-07-1993
			TR 26675 A	05-07-1994
			US 4820675 A	11-04-1989
			US 4808738 A	28-02-1989
			YU 180088 A1	28-02-1990
			YU 197887 A1	31-12-1988
			ZA 8708013 A	29-06-1988
			DD 267435 A5	03-05-1989
			HU 202132 B	28-02-1991
			US 4833261 A	23-05-1989
GB 1319004	A	31-05-1973	NONE	
EP 0625370	A	23-11-1994	US 5447897 A	05-09-1995
			DE 69404748 D1	11-09-1997
			DE 69404748 T2	15-01-1998
			EP 0625370 A1	23-11-1994
			ES 2105493 T3	16-10-1997
			JP 7008798 A	13-01-1995
			US 5486628 A	23-01-1996
US 5545603	A	13-08-1996	DE 69521329 D1	19-07-2001
			DE 69521329 T2	08-11-2001
			WO 9613329 A1	09-05-1996
			EP 0789622 A1	20-08-1997
			ES 2158133 T3	01-09-2001



# INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCI/US 01/18097

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
US 5545603	A		JP 10507964 T US 5663385 A	04-08-1998 02-09-1997
EP 0567273	A	27-10-1993	CA 2078480 A1 EP 0567273 A1 JP 6009591 A US 5262551 A	21-10-1993 27-10-1993 18-01-1994 16-11-1993
US 5380697	A	10-01-1995	AT 164784 T AU 680299 B2 AU 7695194 A BR 9407417 A CA 2171213 A1 CN 1133571 A CZ 9600729 A3 DE 69409536 D1 DE 69409536 T2 DK 717659 T3 WO 9507139 A1 EP 0717659 A1 ES 2114225 T3 FI 961030 A JP 9502129 T NO 960915 A NZ 273597 A PL 313355 A1 RU 2126296 C1 SK 30496 A3 TR 28524 A ZA 9406841 A	15-04-1998 24-07-1997 27-03-1995 12-11-1996 16-03-1995 16-10-1996 11-09-1996 14-05-1998 30-07-1998 21-12-1998 16-03-1995 26-06-1996 16-05-1998 06-03-1996 04-03-1997 06-05-1996 28-10-1996 24-06-1996 20-02-1999 01-10-1996 30-09-1996 24-04-1995
EP 0557833	A	01-09-1993	CA 2089982 A1 DE 59303461 D1 EP 0557833 A1 JP 6009590 A	21-08-1993 26-09-1996 01-09-1993 18-01-1994
US 4400559	A	23-08-1983	AU 556132 B2 AU 1564083 A BE 897039 A1 BR 8303125 A CA 1219602 A1 CH 656871 A5 DD 210026 A5 DE 3321448 A1 EG 16051 A ES 523213 D0 ES 8501357 A1 FR 2528417 A1 GB 2122614 A ,B IN 159399 A1 IT 1169063 B JP 1503780 C JP 59021634 A JP 63027333 B KR 8700542 B1 MX 157512 A NL 8302020 A NO 832140 A ,B,	23-10-1986 22-12-1983 13-12-1983 31-01-1984 24-03-1987 31-07-1986 30-05-1984 15-12-1983 30-10-1990 16-11-1984 16-02-1985 16-12-1983 18-01-1984 16-05-1987 27-05-1987 28-06-1989 03-02-1984 02-06-1988 18-03-1987 28-11-1988 02-01-1984 15-12-1983

# INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/US 01/18097

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 4400559	A	RO 88641 A1	28-02-1986
		SE 459089 B	05-06-1989
		SE 8303324 A	15-12-1983
		SU 1572414 A3	15-06-1990
		YU 129483 A1	28-02-1986
		ZA 8304364 A	27-02-1985
DE 19843697	A 30-03-2000	DE 19843697 A1	30-03-2000
		AU 5980199 A	10-04-2000
		BR 9913889 A	03-07-2001
		CN 1319080 T	24-10-2001
		WO 0017141 A1	30-03-2000
		EP 1115682 A1	18-07-2001
US 3935279	A 27-01-1976	IT 972792 B	31-05-1974
		CA 1011345 A1	31-05-1977
		CH 603519 A5	15-08-1978
		DE 2364150 A1	25-07-1974
		FR 2211438 A1	19-07-1974
		GB 1418510 A	24-12-1975
		JP 55030496 B	11-08-1980
		JP 50046612 A	25-04-1975
		NL 7317387 A	25-06-1974